



Longitudinal Stability Bracing



20 x 100 longitudinal bracing to be provided at all unsupported node points (as show ) and run continuously through parallel trusses along the entire length of the building and fixed to each truss by two 3.35 x 75mm long galvanised wire nails. Where necessary bracing to be lap jointed over at least two trusses.

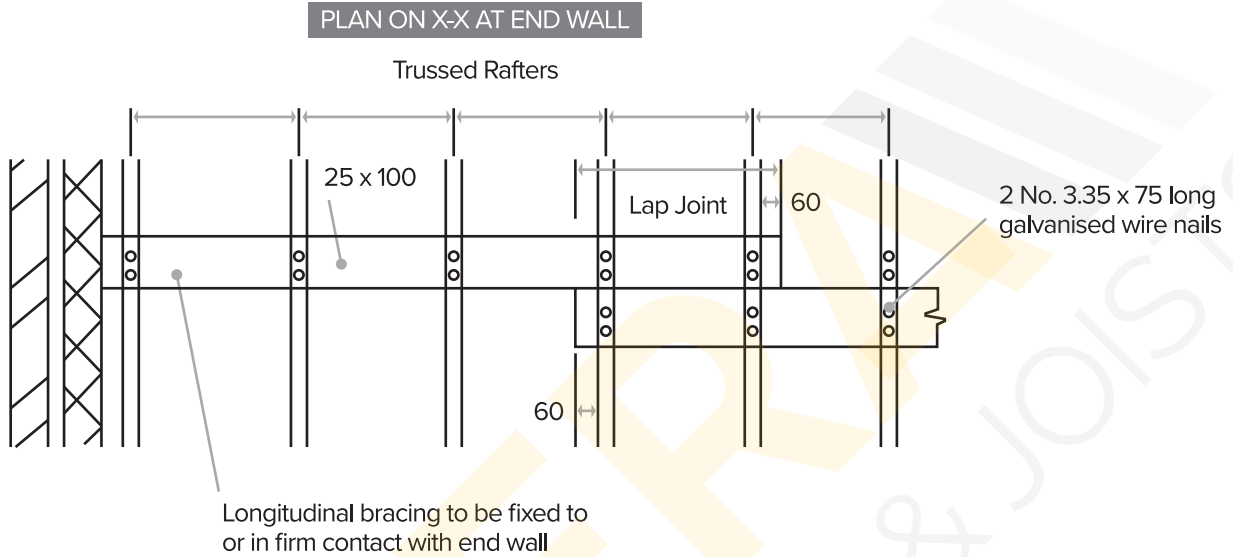